

Schall-Ex® Slide & Lock L-20/20 WS

DETAILS

Articlenumber	1-967
Function	sliding door
Türenmaterial	timber, metal, PVC
Application	interior door
Usage	sound protection, smoke protection, fire protection, accessibility

TECHNICAL DATA



Width	20 mm
Height	20 mm
Min. delivery length	485 mm
Max. delivery length	2000 mm
Standard length	708, 833, 958, 1083, 1208 mm
max. travel	16 mm
Actuation	single-sided
Actuator	Slideauslöser/ Magnet
Outerprofile	aluminium
Surface	plate finish
Sealingprofile	silicone, self-extinguishing

FITTING

Fixing	WS - fixing brackets Haftmagnet
--------	------------------------------------

EXAMINATIONS AND CERTIFICATES

Permanent function IM	yes
Mio Certificate	yes
Leakage rate certificate	yes
Barrier free	yes
EPD	yes

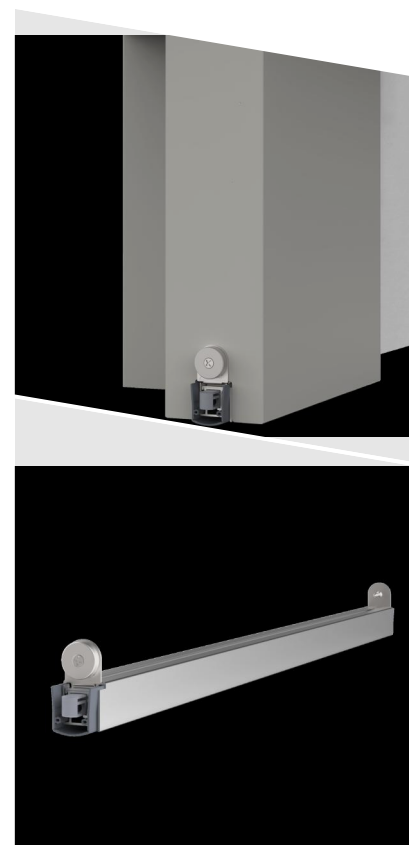

Schall-Ex® Slide & Lock L-20/20 WS

