

# Schall-Ex® L-8/30 WS

## DETAILS

Articlenumber	1-1000
Function	hinged door
Türenmaterial	timber
Application	interior door
Usage	sound protection, smoke protection, fire protection, accessibility

## TECHNICAL DATA


Width	8 mm
Height	30 mm
Min. delivery length	235 mm
Max. delivery length	2000 mm
Standard length	708, 833, 958, 1083, 1208 mm
max. travel	20 mm
Actuation	single-sided
Actuator	sliding acuator
removableInner profile	yes
Outerprofile	aluminium
Surface	plate finish
Sealingprofile	silicone, self-extinguishing

## FITTING

Fixing	WS - fixing brackets
--------	----------------------


## EXAMINATIONS AND CERTIFICATES

Sound	yes
Permanent function IM	yes
Mio Certificate	yes
Barrier free	yes
UL	yes
EPD	yes
Certifire	yes

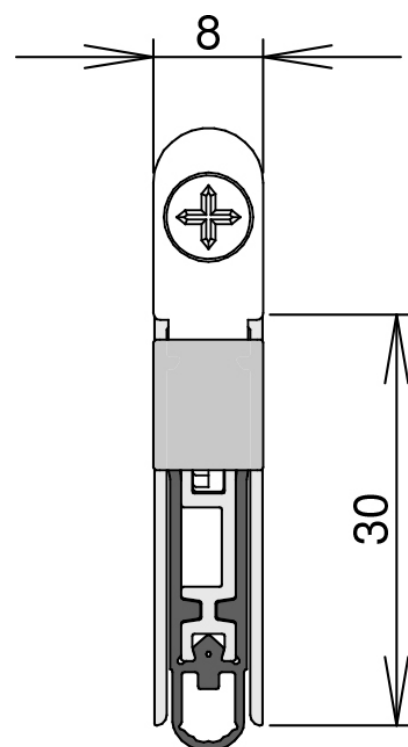



# I-Ex<sup>®</sup> L-8/30 WS

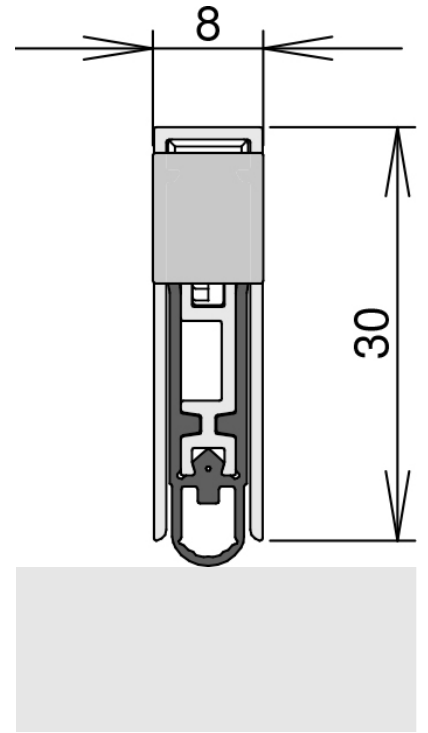

Schall-Ex<sup>®</sup> CLASSIFIED 30 WS



Schall-Ex® L-8/30 WS

