

# Schall-Ex® GS-H20

## DETAILS

|               |   |
|---------------|---|
| Articlenumber | 1-439   |
| Function      | hinged door                                       |
| Türenmaterial | glass   |
| Application   | interior door                                     |
| Usage         | sound protection, smoke protection, accessibility |

## TECHNICAL DATA


|                      |                              |
|----------------------|------------------------------|
| Width                | 25.5 mm                      |
| Height               | 68 mm                        |
| Min. delivery length | 220 mm                       |
| Max. delivery length | 2000 mm                      |
| Thickness of glass   | 20 mm                        |
| Standard length      | 708, 833, 958, 1083, 1208 mm |
| max. travel          | 12 mm                        |
| Actuation            | single-sided                 |
| Actuator             | actuator                     |
| Outerprofile         | aluminium                    |
| Surface              | silver anodized (C-0)        |
| Sealingprofile       | silicone, self-extinguishing |

## FITTING

|        |                                   |
|--------|-----------------------------------|
| Fixing | glue<br>glue/ silicon transparent |
|--------|-----------------------------------|

## EXAMINATIONS AND CERTIFICATES

|                          |     |
|--------------------------|-----|
| Permanent function 200k  | yes |
| Permanent function 1M    | yes |
| Mio Certificate          | yes |
| Leakage rate certificate | yes |
| Barrier free             | yes |
| EPD                      | yes |

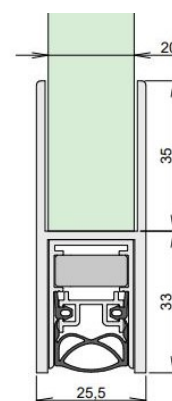



# I-Ex<sup>®</sup> GS-H20

