

Schall-Ex® Duo GS-H20

DETAILS

Articlenumber	1-440
Function	hinged door
Türenmaterial	glass
Application	interior door
Usage	sound protection, smoke protection, accessibility

TECHNICAL DATA



Width	25.5 mm
Height	68 mm
Min. delivery length	708 mm
Max. delivery length	1500 mm
Thickness of glass	20 mm
Standard length	708, 833, 958, 1083, 1208 mm
max. travel	12 mm
Actuation	double-sided
Actuator	actuator/ actuator
Outerprofile	aluminium
Surface	silver anodized (C-0)
Sealingprofile	silicone, self-extinguishing

FITTING

Fixing	glue glue/ silicon transpaent
--------	----------------------------------

EXAMINATIONS AND CERTIFICATES

Permanent function 200k	yes
Permanent function 1M	yes
Mio Certificate	yes
Leakage rate certificate	yes
Barrier free	yes
EPD	yes

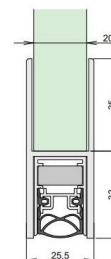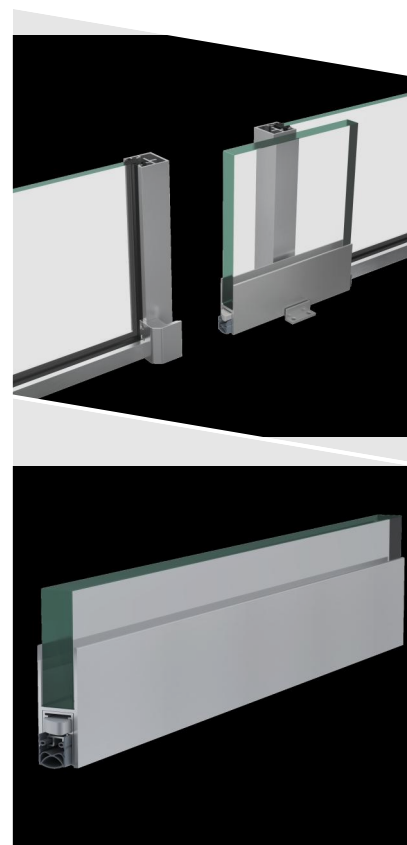



I-Ex[®] Duo GS-H20

