

# Schall-Ex® L-15 FS C-31

## DETAILS

Articlenumber	1-885
Function	hinged door
Türenmaterial	timber, metal, PVC
Application	exterior door, interior door
Usage	sound protection, smoke protection, fire protection, accessibility

## TECHNICAL DATA



Width	17.2 mm
Height	54 mm
Min. delivery length	235 mm
Max. delivery length	2335 mm
Standard length	805, 930, 1055 mm
max. travel	20 mm
Actuation	single-sided
Actuator	sliding acutator
Outerprofile	aluminium
Sealingprofile	silicone, self-extinguishing

## FITTING


Fixing	FS - surface mounted (concealed screws)
--------	--

## EXAMINATIONS AND CERTIFICATES

Permanent function 200k	yes
Leakage rate certificate	yes
Corrision test	yes
Corrision	yes
Barrier free	yes
UL	yes
EPD	yes
Certifire	yes

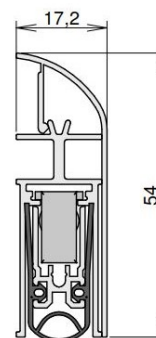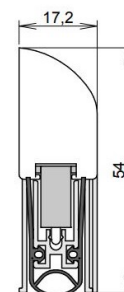

**CLASSIFIED**  
**UL** **I-Ex<sup>®</sup> L-15 FS C-31**

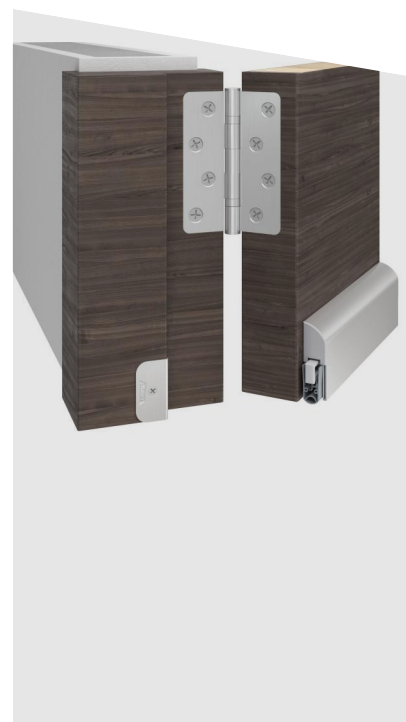

# Schall-Ex® FS C-31

