

# Rainstop® L-24/20 WS

## DETAILS

Articlenumber	1-955
Function	hinged door
Türenmaterial	timber, metal, PVC
Application	exterior door
Usage	sound protection, smoke protection, fire protection, accessibility, driving rain

## TECHNICAL DATA




Width	24 mm
Height	20 mm
Min. delivery length	230 mm
Max. delivery length	2000 mm
Standard length	750, 900, 1050, 1200, 1250 mm
max. travel	16 mm
Actuation	single-sided
Actuator	sliding acuator
removableInner profile	yes
Outerprofile	aluminium
Surface	silver anodized (C-0)
Sealingprofile	silicone, self-extinguishing

## FITTING

Fixing	WS - fixing brackets
Espagnolette bolt	yes

## EXAMINATIONS AND CERTIFICATES

Sound	yes
Permanent function 200k	yes
Mio Certificate	yes
Leakage rate certificate	yes
Corrision test	yes
Corrision	yes
Barrier free	yes

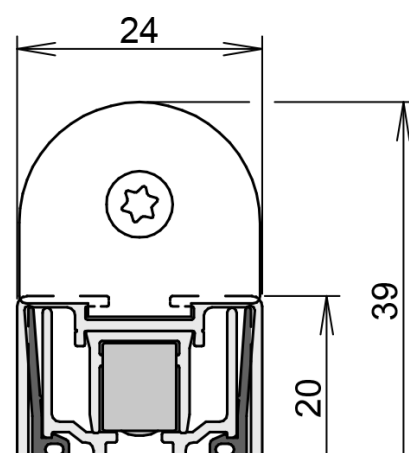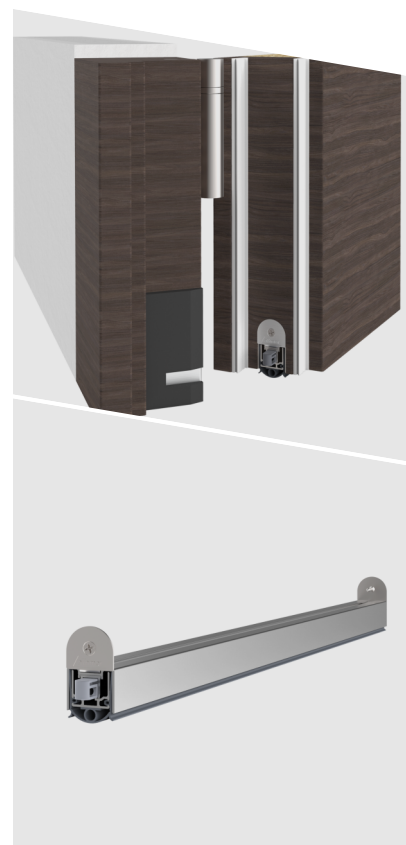

# Rainstop® L-24/20 WS

UL	yes
----	-----

EPD	yes
-----	-----

