

Stadi L-24/20 OS

DETAILS

Articlenumber	1-959
Function	hinged door
Türenmaterial	timber, metal, PVC
Application	exterior door, internal door
Usage	draught, smoke protection, fire protection, accessibility

TECHNICAL DATA



Groove width	24 mm
Groove depth	19 mm
Min. delivery length	230 mm
Max. delivery length	3000 mm
Default length	750, 900, 1200 mm
max. travel	16 mm
Actuation	single-sided
Actuator	Gleitauslöser
Innenprofil ausschiebbar	yes
Outerprofile	aluminium
Surface	silver anodized [C-0]
Sealingprofile	Silikon

FITTING

Fixing	OS - Omega schrauben von unten verschrauben
Espagnolette bolt	yes

EXAMINATIONS AND CERTIFICATES

Permanent function 200k	yes
Leakage rate certificate	yes
Barrier free	yes
UL	yes
EPD	yes

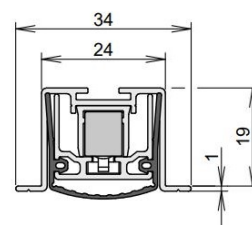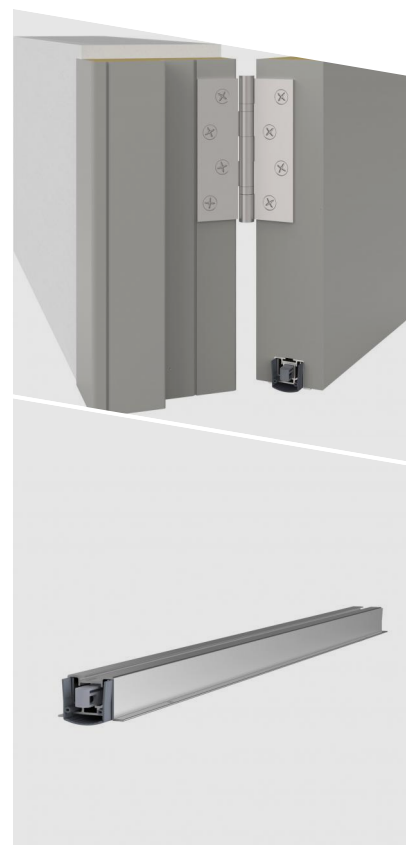

Stadi L-24/20 OS

REACH yes

Certifire yes

